



**TYPICAL CHANNEL SECTION**  
NTS

**NOTES**

- VALUES FOR D, B AND SIDE SLOPES SHALL BE SPECIFIED ON PROJECT DRAWINGS.
- ACCESS ROAD SHALL BE 2" HIGHER THAN CONCRETE LINING.
- TRANSVERSE JOINTS SHALL BE CONSTRUCTED 10' ON CENTER.
- WEEPHOLES SHALL BE FORMED AS SHOWN IN BOTH WALLS AT A SPACING OF 10' ON CENTER AT TRANSVERSE JOINTS WITH ONE CUBIC FOOT OF FILTER MATERIAL WRAPPED IN FILTER FABRIC PLACED AT EACH HOLE.
- SUBDRAIN IS REQUIRED WHEN B=6' OR GREATER OR AS REQUIRED BY GROUND WATER CONDITION. FOR REQUIRED NUMBER OF SUBDRAINS, SEE PLAN & PROFILE.

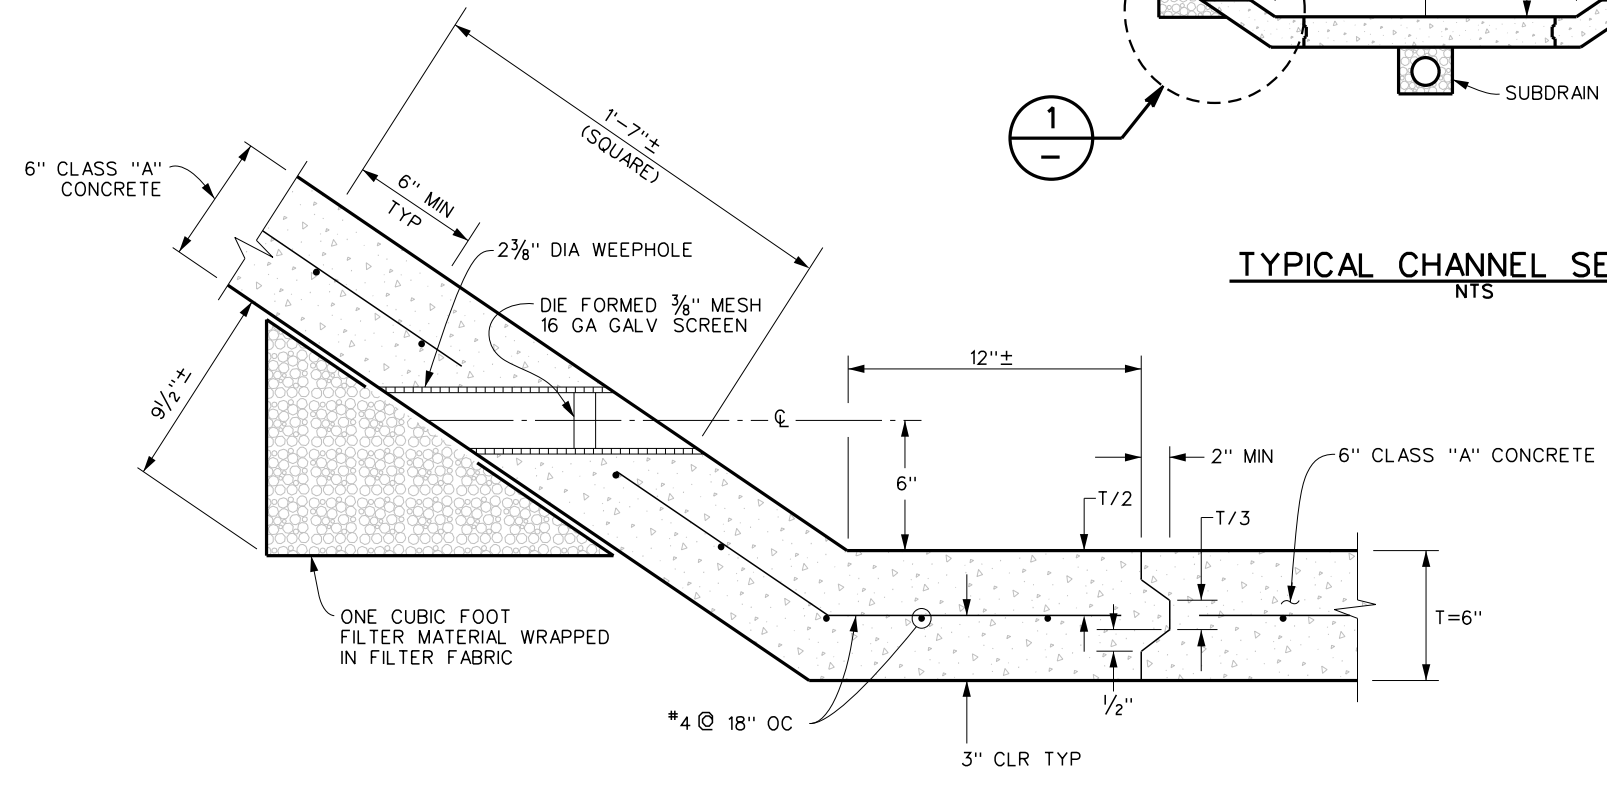

**TYPICAL LONGITUDINAL CONSTRUCTION JOINT**  
NTS

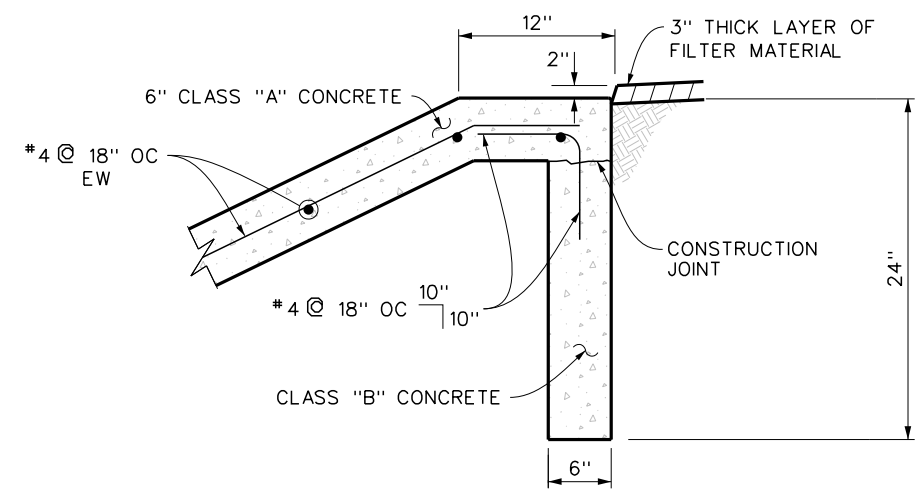

**2' CUTOFF WALL**  
NTS



RIVERSIDE COUNTY FLOOD CONTROL AND WATER CONSERVATION DISTRICT	
APPROVED BY: <i>[Signature]</i> GENERAL MANAGER-CHIEF ENGINEER	APPROVED BY: <i>[Signature]</i> CHIEF DESIGN
DATE: 3-27-2024	DATE: 3-27-2024
R.C.E. NO. 59795	R.C.E. NO. 72196

**TRAPEZOIDAL CONCRETE  
LINED CHANNEL DETAILS**  
STANDARD DRAWING NUMBER CH326  
SHEET 1 OF 1